


SACA BOCADOS


HIDRÁULICO




1 ... furos de qualquer formato





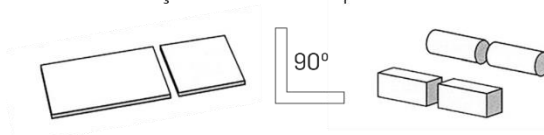



2 ... corte de barras, cantoneiras e maciços redondos ou quadrados



3 ... entalhes



		capacidade máxima (Ton.)				cava normal	cava profunda	curso	dimensões (mm) CXLXA	peso (Kg)	potência KW
											
HKM65	125x125x12	16x250 / 8x400	40	45	∅25x16	300	600	80	1640x730x1770	1600	4
HKM90	140x140x12	20x330 / 10x480	50	50	∅30x20	355	600	80	1860x800x1900	2000	5.5
HKM120	160x160x14	25x330 / 16x600	50	60	∅35x25	400	600	80	2355x960x2090	4800	7.5

Possibilidade de trabalhar com dois operadores em simultâneo

Disponível em diferentes capacidades.

Todos os modelos se encontram em conformidade com as normas da CE.